

Tiger Neo N-type 54HL4R-(V) 425-445 Watt MONO-FACIAL MODULE

N-Type


IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems
(Made in China)

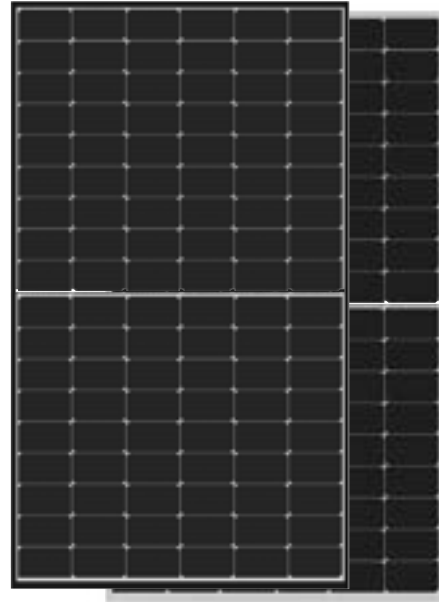

Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.




Enhanced Mechanical Load

Certified to withstand: wind load (4000 Pascal) and snow load (6000 Pascal).



LINEAR PERFORMANCE WARRANTY

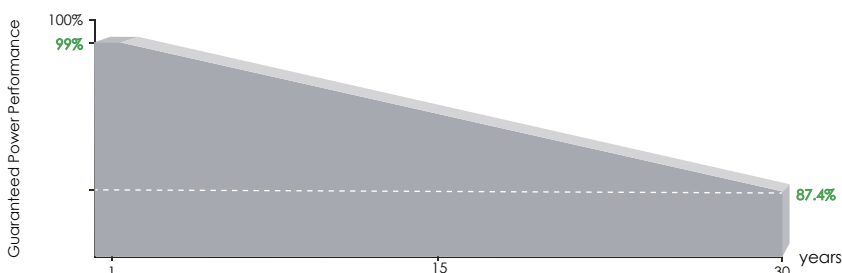



25* Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

*The product warranty is only applicable in Australia

Engineering Drawings

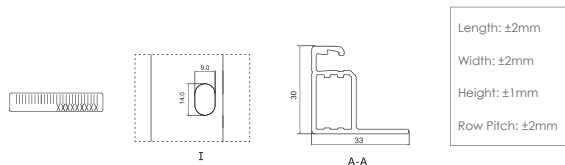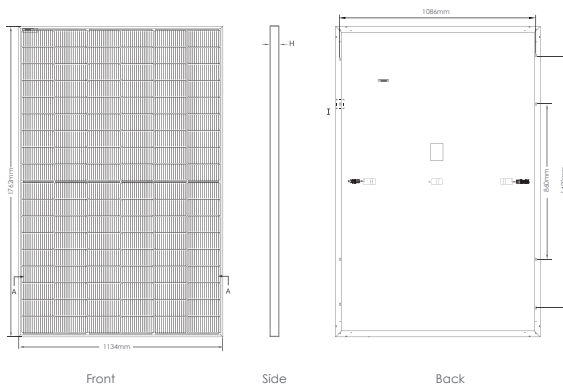


*This tolerance range applies only to the four-angle distance of the module as indicated above.

Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 936pcs/ 40'HQ Container

Electrical Performance & Temperature Dependence

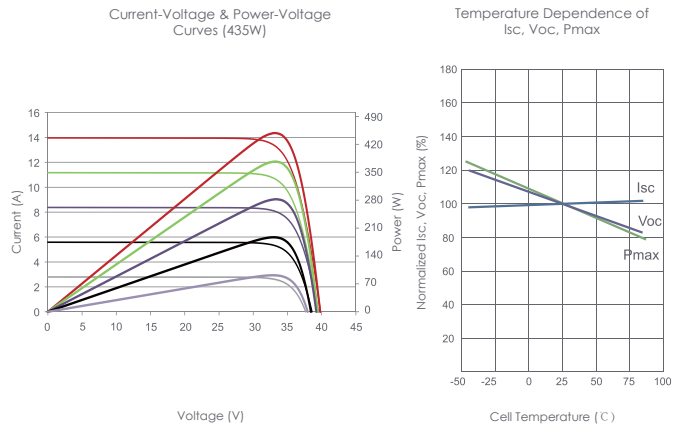

Mechanical Characteristics

| | |
|---------------|--|
| Cell Type | N type Mono-crystalline |
| No. of cells | 108 (2×54) |
| Dimensions | 1762×1134×30mm (69.36×44.65×1.18 inch) |
| Weight | 22 kg (48.50 lbs) |
| Front Glass | 3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass |
| Frame | Anodized Aluminium Alloy |
| Junction Box | IP68 Rated |
| Output Cables | TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length |
| Connector | 1000V: Staubli MC4, JK03M/1B, JK03M2/1B, Jinko PV material Type 1500V: Staubli MC4-EVO2, JK03M/2B, JK03M2/2B, Jinko PV material |
| Fire Class | Class C |

SPECIFICATIONS

| Module Type | JKM425N-54HL4R | | JKM430N-54HL4R | | JKM435N-54HL4R | | JKM440N-54HL4R | | JKM445N-54HL4R | |
|---|--|--------|----------------|--------|----------------|--------|----------------|--------|----------------|--------|
| | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT |
| Maximum Power (Pmax) | 425Wp | 320Wp | 430Wp | 323Wp | 435Wp | 327Wp | 440Wp | 331Wp | 445Wp | 335Wp |
| Maximum Power Voltage (Vmp) | 32.18V | 29.99V | 32.38V | 30.10V | 32.59V | 30.33V | 32.81V | 30.56V | 33.02V | 30.76V |
| Maximum Power Current (Imp) | 13.21A | 10.67A | 13.28A | 10.73A | 13.35A | 10.78A | 13.41A | 10.83A | 13.48A | 10.89A |
| Open-circuit Voltage (Voc) | 38.75V | 36.81V | 38.95V | 37.00V | 39.16V | 37.20V | 39.38V | 37.41V | 39.59V | 37.61V |
| Short-circuit Current (Isc) | 13.66A | 11.03A | 13.73A | 11.09A | 13.80A | 11.14A | 13.86A | 11.19A | 13.93A | 11.25A |
| Module Efficiency STC (%) | 21.27% | | 21.52% | | 21.77% | | 22.02% | | 22.27% | |
| Operating Temperature (°C) | -40°C~+85°C | | | | | | | | | |
| Maximum system voltage | 1000/1500VDC (IEC) with -V=1500V, without -V=1000V | | | | | | | | | |
| Maximum series fuse rating | 25A | | | | | | | | | |
| Power measurement tolerance | ±3% | | | | | | | | | |
| Temperature coefficients of Pmax | -0.29%/°C | | | | | | | | | |
| Temperature coefficients of Voc | -0.25%/°C | | | | | | | | | |
| Temperature coefficients of Isc | 0.045%/°C | | | | | | | | | |
| Nominal operating cell temperature (NOCT) | 45±2°C | | | | | | | | | |

*STC: Irradiance 1000W/m² Cell Temperature 25°C

NOCT: Irradiance 800W/m² Ambient Temperature 20°C

AM=1.5

AM=1.5

Wind Speed 1m/s